

# INDUSTRIAL + COMMERCIAL

Landis+Gyr Dialog

## ZMD310AT/CT

### TECHNICAL DATA



#### General

#### Voltage

Nominal Voltage $U_n$ ZMD310xT	3 x 110/190–133/230 V 3 x 220/380–240/415 V
--------------------------------	--

Voltage Range	80–115% $U_n$
---------------	---------------

#### Frequency

Nominal Frequency $f_n$	50 or 60 Hz
tolerance	± 2%

#### IEC-specific data

#### Current

Base Current $I_b$	selectable 5, 10, 20, 40 A
--------------------	----------------------------

#### Maximal Current $I_{max}$

metrological	selectable 40, 60, 80, 100, 120 A
thermal	120 A

Short Circuit ≤ 10 ms	5000 A
-----------------------	--------

#### Measurement Accuracy

active energy to IEC 62053-21	class 1
reactive energy to IEC 62053-23	class 1

#### Measurement Behaviour

##### Starting Current ZxD310xT

according to IEC	0.4% $I_n$
typical	0.3% $I_n$
The startup of the meter is controlled by the starting power and not by the starting current.	

Starting Power in M-Circuit	single phase nominal power x starting current
-----------------------------	--

#### MID-specific data

#### Current (for Class B)

Minimum Current $I_{min}$	0.25, 0.5, 0.75, 1.0 A
---------------------------	------------------------

Transitional Current $I_{tr}$	0.5, 1.0, 1.5, 2.0 A
-------------------------------	----------------------

Maximum Current $I_{max}$	120 A
---------------------------	-------

#### Measurement Accuracy

ZMD300AT/CT; to EN 50470-3	Class B
----------------------------	---------

#### Measurement Behaviour

Starting Current $I_{st}$	0.02, 0.04, 0.06, 0.08 A
---------------------------	--------------------------

#### General

#### Operating Behaviour

Voltage Failure (Power Down)	
bridging time according to IEC	0.5 s
data storage	after another 0.2 s
switch off	after approx. 2.5 s

<b>Voltage Restoration (Power Up)</b>		
function standby 3 phases		after 2 s
function standby 1 phase		after 5 s
detection of energy direction + phase voltage		after 2 to 3 s

## Power Consumption

<b>Power Consumption per Phase in Voltage Circuit</b>		
phase voltage	110 V	240 V
active power (typical)	0.6 W	1.1 W
apparent power (typical)	0.8 VA	1.5 VA

<b>Power Consumption per Phase in Current Circuit</b>		
phase current		10 A
apparent power (typical)		0.03 VA

## Environmental Influences

<b>Temperature Range</b>		to IEC 62052-11
operation		-25 °C to +70 °C
storage		-40 °C to +85 °C

<b>Temperature Coefficient</b>	
range	-25 °C to +70 °C
average value (typical)	± 0.012% per K
at $\cos\phi=1$ (from 0.05 Ib to $I_{\max}$ )	± 0.02% per K
at $\cos\phi=0.5$ (from 0.1 Ib to $I_{\max}$ )	± 0.03% per K

<b>Impermeability according to IEC 60529</b>	IP51
--	------

## Electromagnetic Compatibility

<b>Electrostatic Discharges</b>		to IEC 61000-4-2
contact discharge		15 kV

<b>Electromagnetic RF Fields</b>		to IEC 61000-4-3
80 MHz – 2 GHz		10 and 30 V/m


<b>Radio Interference Suppression</b>		
according to IEC/CISPR 22		class B

<b>Fast Transient Burst Test</b>		to IEC 61000-4-4
current and voltage circuits not under load		4 kV
current and voltage circuits under load		
according to IEC 62053-21/22/23		2 kV
auxiliary circuits > 40 V		1 kV

<b>Fast Transient Surge Test</b>		to IEC 61000-4-5
current and voltage circuits		4 kV
auxiliary circuits > 40 V		1 kV

## Insulation Strength

<b>Insulation Strength</b>	4 kV @ 50 Hz during 1 min
----------------------------	---------------------------

<b>Impulse Voltage 1.2/50µs</b>		to IEC 62052-11
current and voltage circuits		8 kV
auxiliary circuits		6 kV
<b>Protection Class II according to IEC 62052-11</b>		

## Calendar Clock

<b>Calendar Type</b>	Gregorian or Persian (Jalaali)
----------------------	--------------------------------

<b>Accuracy</b>	< 5 ppm
-----------------	---------

<b>Backup Time (Power Reserve)</b>	
with supercap	> 20 days
loading time for max. backup time	300 h
with battery (optional)	10 years
battery type	CR-P2

## Display

<b>Characteristics</b>	
type	LCD liquid crystal display
digit size in value field	8 mm
number of positions in value field	up to 8
digit size in index field	6 mm
number of positions in index field	up to 8

## Inputs and Outputs

<b>Control Inputs</b>	
control voltage $U_s$	100–240 V AC
input current	< 2 mA ohmic at 230 V AC

<b>Output Contacts</b>	
type	solid state relay
voltage	12–240 V AC/DC
max. current	100 mA
max. pulse frequency (pulse length 20 ms)	25 Hz

<b>Optical Test Output</b>		Active and Reactive Energy
type		red LED
number		2
meter constant		selectable

## Communication Interfaces

<b>Optical Interface</b>		according to IEC 62056-21
type		serial, bidirectional, half duplex
max. bit rate		9600 bps
protocols		IEC 62056-21 and dlms

<b>Communication Units</b>	
Exchangeable communication units for various applications.	

## Additional Power Supply (optional)

### On Extension Board 045x

nominal voltage range	100–240 V AC/DC
tolerance	80–115% $U_n$
frequency	50 or 60 Hz
max. power consumption	6.8 W

### On Extension Board 046x

nominal voltage range	12–24 VDC
tolerance	80–115% $U_n$
max. power consumption	3.5 W

## Ripple Control Receiver (optional)

### On Extension Board 043x or 003x

Same functionality as RCR161.

All established RCR systems e.g. Semagyr, Ricontic, Decabit, Double Decabit, K22/Z22 are supported.

Code length, pulse length and pulse position can be parameterised.

### Electrical Data

nominal voltage	58 or 230 V
frequency	50 or 60 Hz

### Filter Values (parameterisable)

functional voltage $U_f$	0.3–2.5% $U_n$
control frequency $f_s$	110–2000 Hz
bandwidth	0.6–6% $f_s$

## Weight and Dimensions

Weight	approx. 1.5 kg
--------	----------------

### External Dimensions

width	177 mm
height (with short terminal cover)	244 mm
height (with standard terminal cover)	281.5 mm
height (with extended hook)	305.5 mm
depth	75 mm

### Suspension Triangle

height (with extended hook)	230 mm
height (suspension eyelet open)	206 mm
height (suspension eyelet covered)	190 mm
width	150 mm

### Terminal Cover

short	no free space
standard	40 mm free space
long	60 mm free space
GSM	60 mm free space
ZxB-type 80 mm	80 mm free space
ZxB-type 110 mm	110 mm free space
ADP1 adapter	
RCR/FTY adapter	


## Connections

### Phase Connections


type	screw type terminals
diameter for $I_{max} \leq 80$ A	8.5 mm
diameter for position $> 80$ A	9.5 mm
minimal conductor cross section	4 mm <sup>2</sup>
max. cross section cable	35 mm <sup>2</sup> (up to 120 A)
max. cross section strand	25 mm <sup>2</sup> (up to 80 A)
screw head	Pozidrive Combi No. 2
screw dimension	M6 x 14
max. screw head diameter	$\leq 6.6$ mm
tightening torque	$< 3$ Nm

### Other Connections


type	screwless spring-type terminal
max. current of voltage outputs	1 A
max. voltage of inputs	250 V

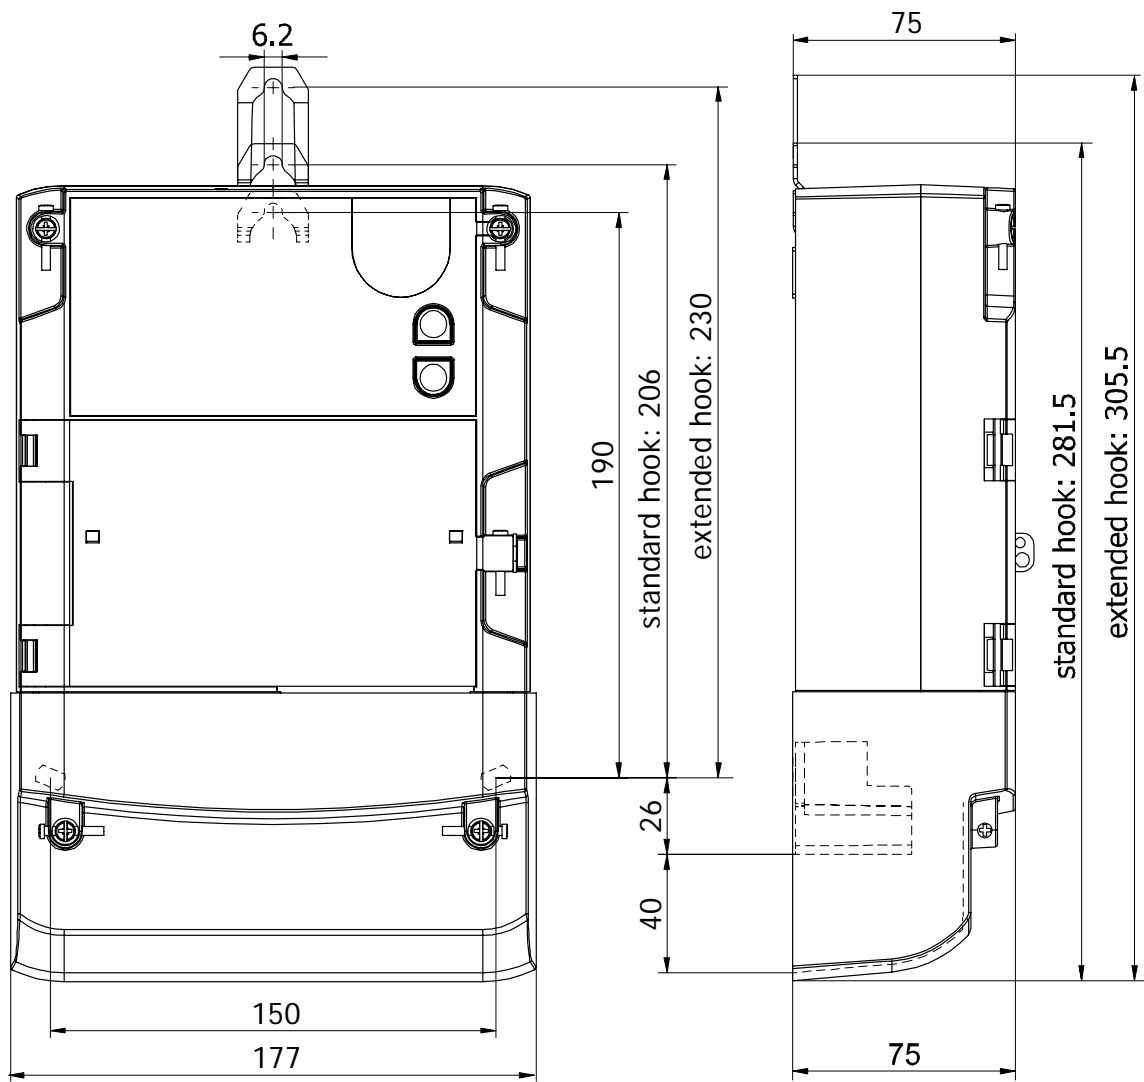

## Terminal Layout

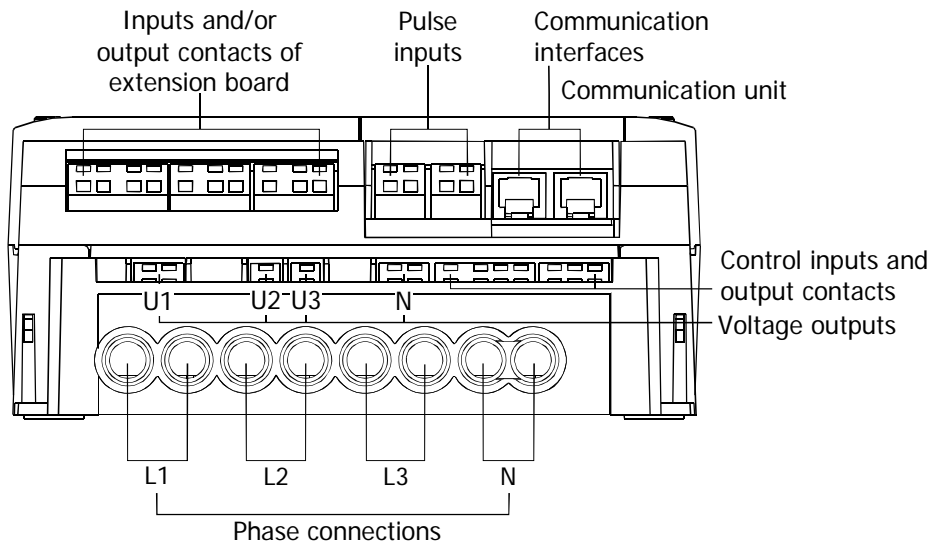

## Terminal Dimensions

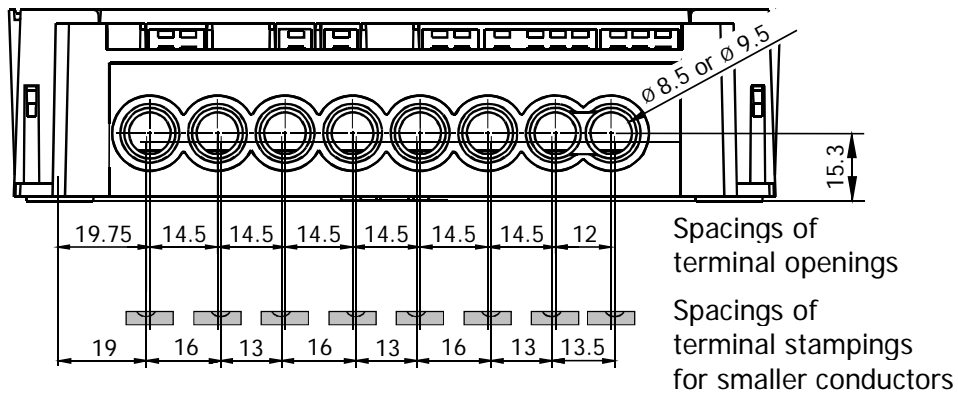

## Material

### Housing

The meter housing is made of polycarbonate which is partly glass-fibre reinforced.

<b>Type designation</b>	ZMD	3	10	C	T	44	4207
<b>Network Type</b>	_____						
ZFD	3-phase 3 wire network (F-circuit)						
ZMD	3-phase 4 wire network (M-circuit)						
<b>Connection Type</b>	_____						
3	Direct connection						
4	Transformer operated						
<b>Accuracy Class</b>	_____						
10	Active energy class 1 (IEC), B (MID)						
<b>Measured Quantities</b>	_____						
C	Active and reactive energy						
A	Active energy						
<b>Construction</b>	_____						
T	With exchangeable communication units						
<b>Tariffication</b>	_____						
21	Energy rates, external rate control via control inputs						
24	Energy rates, internal rate control via time switch (additionally possible via control inputs)						
41	Energy and demand rates, external rate control via control inputs						
44	Energy and demand rates, internal rate control via time switch (additionally possible via control inputs)						
	All versions with 3 control inputs and 2 output contacts						
<b>Additional functions</b>	_____						
060x	6 outputs						
240x	2 control inputs, 4 outputs						
420x	4 control inputs, 2 outputs						
003x	integrated ripple control receiver						
043x	4 outputs, integrated ripple control receiver						
045x	4 outputs, additional power supply 100–240 V AC/DC						
046x	4 outputs, additional power supply 12–24 V DC						
xxx0	no additional functions						
xxx2	DC-magnet-detection						
xxx7	load profile						
xxx9	DC-magnet-detection and load profile						

Subject to change without notice.

**Landis+Gyr Ltd.**  
 Feldstrasse 1  
 CH-6301 Zug  
 Switzerland  
 Phone: +41 41 935 6000  
 www.landisgyr.com

