

INDUSTRIAL + COMMERCIAL

Landis+Gyr Dialog

ZMD400AT/CT, ZFD400AT/CT

TECHNICAL DATA



General

Voltage

Nominal Voltage U_n ZMD400xT

3 x 58/100–69/120 V

3 x 110/190–133/230 V

3 x 220/380–240/415 V

extended operating voltage range

3 x 58/100–240/415 V

Nominal Voltage U_n ZFD400xT

3 x 100–120 V

3 x 220–240 V

extended operating voltage range 3 x 100–415 V

Voltage Range 80–115% U_n

Frequency

Nominal Frequency f_n 50 or 60 Hz
tolerance $\pm 2\%$

IEC-specific data

Current

Nominal Current I_n 1 A, 2 A, 5 A, 5||1 AMaximal Current I_{max} metrological 1 A, 2 A, 5 A 200% I_n

metrological 5||1 A 6 A

thermal 1 A 2.4 A

thermal 2 A, 5 A, 5||1 A 12 A

Short Circuit Current 0.5 s with 20 x I_{max}

Measurement Accuracy

Accuracy ZxD405xT

active energy to IEC 62053-22 class 0.5 S

reactive energy to IEC 62053-23 class 1

Accuracy ZxD410xT

active energy to IEC 62053-21 class 1

reactive energy to IEC 62053-23 class 1

Measurement Behaviour

Starting Current ZxD405xT

according to IEC 0.1% I_n typical 0.07% I_n

5||1 A as 1 A meter

Starting Current ZxD410xT

according to IEC 0.2% I_n typical 0.14% I_n

5||1 A as 1 A meter

The startup of the meter is controlled by the starting power and not by the starting current.

Starting Power in M-Circuit single phase

nominal power x starting current

Starting Power in F-Circuit all phases
nominal voltage / $\sqrt{3}$ x starting current x 3

MID-specific data

Current (for Classes B and C)

Rated Current I_n 1.0, 5.0 A

Minimum Current I_{min} 0.01, 0.05 A

Transitional Current I_{tr} 0.05, 0.25 A

Maximum Current I_{max} 2.0, 10.0 A

Measurement Accuracy

ZxD400XT; to EN 50470-3 Classes B and C

Measurement Behaviour

Starting Current I_{st}

Class B: I_{st} 0.002, 0.01 A

Class C: I_{st} 0.001, 0.005 A

General

Operating Behaviour

Voltage Interruption (Power Down)

bridging time according to IEC 0.5 s

data storage after another 0.2 s

switch off after approx. 2.5 s

Voltage Restoration (Power Up)

function standby 3 phases after 2 s

function standby 1 phase after 5 s

detection of

energy direction + phase voltage after 2 to 3 s

Power Consumption

Power Consumption per Phase in the Voltage Circuit

phase voltage 58 V 110 V 240 V

active power (typical) 0.65 W 0.7 W 0.8 W

apparent power (typical) 1.3 VA 1.7 VA 3.6 VA

Power Consumption per Phase in the Current Circuit

phase current 1 A 5 A 10 A

active power (typical) 5 mW 0.125 W 0.5 W

apparent power (typical) 5 mA 0.125 VA 0.5 VA

Environmental Influences

Temperatur Range to IEC 62052-11

operation -25 °C to +70 °C

storage -40 °C to +85 °C

Temperature Coefficient

range from -25 °C to +70 °C

average value (typical) $\pm 0.012\%$ per K
at $\cos\phi=1$ (from 0.05 Ib to I_{max}) $\pm 0.02\%$ per K
at $\cos\phi=0.5$ (from 0.1 Ib to I_{max}) $\pm 0.03\%$ per K

Impermeability according to IEC 60529 IP51

Electromagnetic Compatibility

Electrostatic Discharges to IEC 61000-4-2
contact discharge 15 kV

Electromagnetic RF Fields to IEC 61000-4-3
80 MHz – 2 GHz 10 and 30 V/m

Radio Interference Suppression
according to IEC/CISPR 22 class B


Fast Transient Burst Test to IEC 61000-4-4
current and voltage circuits not under load 4 kV
current and voltage circuits under load
according to IEC 62053-21/22/23 2 kV
auxiliary circuits > 40 V 1 kV

Fast Transient Surge Test to IEC 61000-4-5
current and voltage circuits 4 kV
auxiliary circuits > 40 V 1 kV

Insulation Strenght

Insulation Strenght 4 kV @ 50 Hz during 1 min

Impulse Voltage 1.2/50 μ s to IEC 62052-11
current and voltage circuits 8 kV
auxiliary circuits 6 kV

Protection Class II according to IEC 62052-11 

Calendar Clock

Calendar Type Gregorian or Persian (Jalaali)

Accuracy < 5 ppm

Backup Time (Power Reserve)

with supercap > 20 days

loading time for max. backup time 300 h

with battery (optional) 10 years

battery type CR-P2

Display

Characteristics

type LCD liquid crystal display

digit size in value field 8 mm

number of positions in value field up to 8

digit size in index field 6 mm

number of positions in index field up to 8

Inputs and Outputs

Control Inputs

control voltage U_s	100–240 V AC
input current	< 2 mA ohmic at 230 V AC

Output Contacts

type	solid state relay
voltage	12–240 V AC/DC
max. current	100 mA
max. pulse frequency (pulse length 20 ms)	25 Hz

Optical Test Output Active and Reactive Energy

type	red LED
number	2
meter constant	selectable

Communication Interfaces

Optical Interface according to IEC 62056-21

type	serial, bidirectional, half duplex
max. bit rate	9600 bps
protocols	IEC 62056-21 and dlms

Communication Units

Exchangeable communication units for various applications.

Additional Power Supply (optional)

On Extension Board 045x

nominal voltage range	100–240 V AC/DC
tolerance	80–115% U_n
frequency	50 or 60 Hz
max. power consumption	6.8 W

On Extension Board 046x

nominal voltage range	12–24 VDC
tolerance	80–115% U_n
max. power consumption	3.5 W

Ripple Control Receiver (optional)

On Extension Board 043x or 003x (ZMD400 only)

Same functionality as RCR161.

All established RCR systems e.g. Semagyr, Ricontic, Decabit, Double Decabit, K22/Z22 are supported.

Code length, pulse length and pulse position can be parameterised.

Electrical Data

nominal voltage	58 or 230 V
frequency	50 or 60 Hz

Filter Values (parameterisable)

functional voltage U_f	0.3–2.5% U_n
control frequency f_s	110–2000 Hz
bandwidth	0.6–6% f_s

Weight and Dimensions

Weight	approx. 1.5 kg
--------	----------------

External Dimensions

width	177 mm
height (with short terminal cover)	244 mm
height (with standard terminal cover)	281.5 mm
height (with extended hook)	305.5 mm
depth	75 mm

Suspension Triangle

height (with extended hook)	230 mm
height (suspension eyelet open)	206 mm
height (suspension eyelet covered)	190 mm
width	150 mm

Terminal Cover

short	no free space
standard	40 mm free space
long	60 mm free space
GSM	60 mm free space
ZxB-type 80 mm	80 mm free space
ZxB-type 110 mm	110 mm free space
ADP1 adapter	
RCR/FTY adapter	

Material

Housing

The meter housing is made of polycarbonate which is partly glass-fibre reinforced.

Connections


Phase Connections

type	screw type terminals
diameter	5.2 mm
recommended conductor cross section	4–6 mm ²
screw head	Pozidrive Kombi No. 2
screw dimensions	M4 x 8
screw head diameter	≤ 5.8 mm
tightening torque	< 1.7 Nm


Other Connections

type	screwless spring-type terminal
max. current of voltage outputs	1 A
max. voltage of inputs	250 V


Meter Dimensions (Standard Terminal Cover)

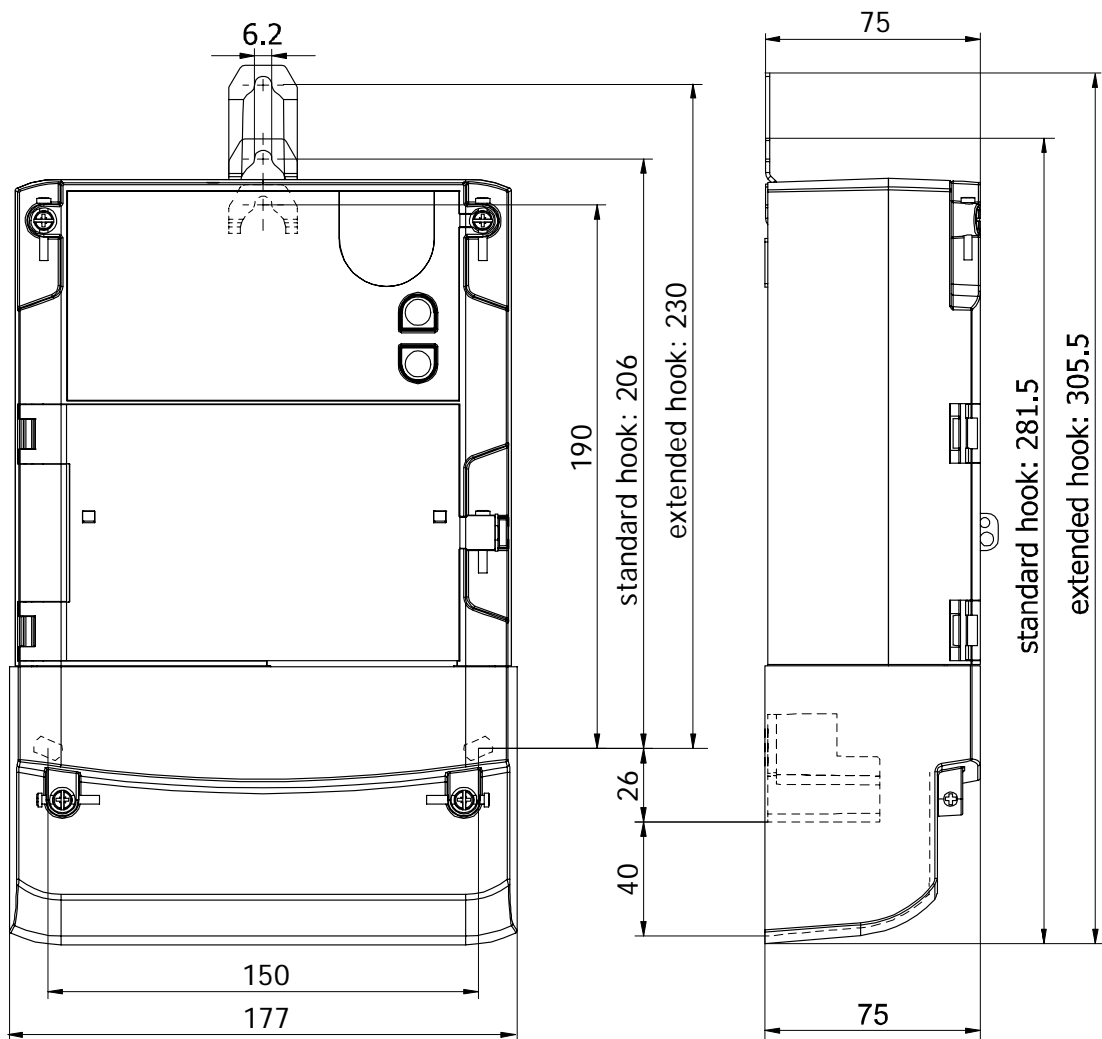


Terminal Dimensions

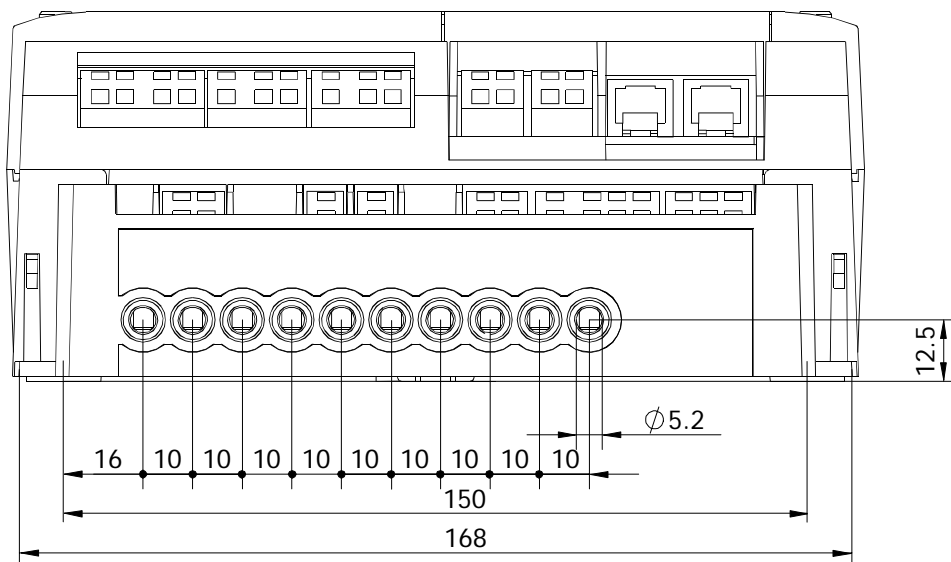

Terminal Layout according to DIN

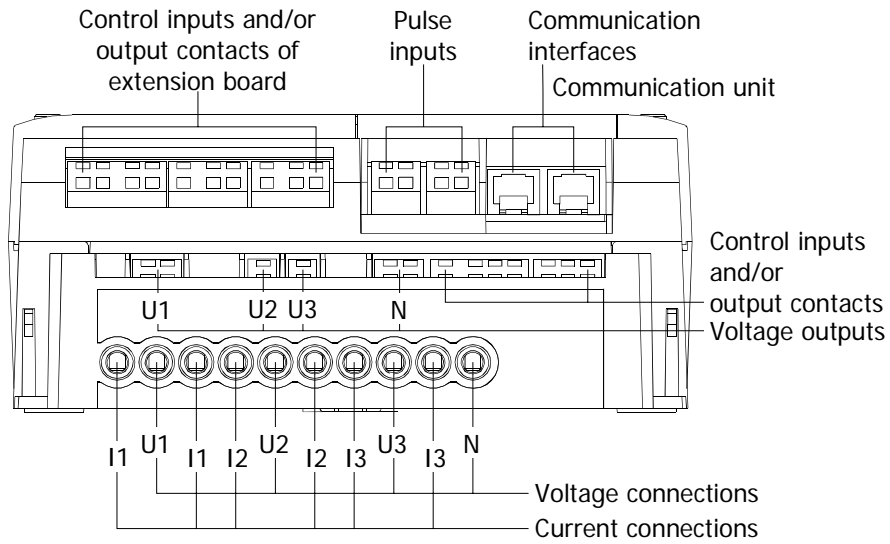

Symmetrical Terminal Layout (optional, ZMD400 only)

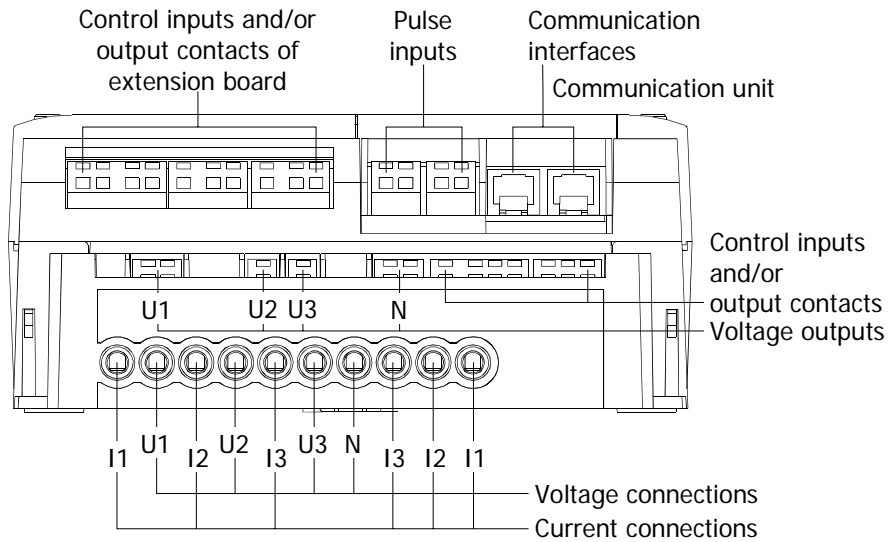

Type designation	ZMD	4	10	C	T	44	4207
Network Type	<ul style="list-style-type: none"> ZFD 3-phase 3 wire network (F-circuit) ZMD 3-phase 4 wire network (M-circuit) 						
Connection Type	<ul style="list-style-type: none"> 3 Direct connection 4 Transformer operated 						
Accuracy Class	<ul style="list-style-type: none"> 10 Active energy class 1 (IEC), B (MID) 05 Active energy class 0.5 (IEC), C (MID) 						
Measured Quantities	<ul style="list-style-type: none"> C Active and reactive energy A Active energy 						
Construction	<ul style="list-style-type: none"> T With exchangeable communication units 						
Tariffication	<ul style="list-style-type: none"> 21 Energy rates, external rate control via control inputs 24 Energy rates, internal rate control via time switch (additionally possible via control inputs) 41 Energy and demand rates, external rate control via control inputs 44 Energy and demand rates, internal rate control via time switch (additionally possible via control inputs) <p>All versions with 3 control inputs and 2 output contacts</p>						
Additional functions	<ul style="list-style-type: none"> 060x 6 outputs 240x 2 control inputs, 4 outputs 420x 4 control inputs, 2 outputs 003x integrated ripple control receiver 043x 4 outputs, integrated ripple control receiver 045x 4 outputs, additional power supply 100–240 V AC/DC 046x 4 outputs, additional power supply 12–24 V DC xxx0 no additional functions xxx2 DC-magnet-detection xxx7 load profile xxx9 DC-magnet-detection and load profile 						

Subject to change without notice.

Landis+Gyr Ltd.
 Feldstrasse 1
 CH-6301 Zug
 Switzerland
 Phone: +41 41 935 6000
 www.landisgyr.com

