

INDUSTRIAL + COMMERCIAL

Landis+Gyr Dialog

ZMD310AR/CR

TECHNICAL DATA



General

Voltage

Nominal Voltage U_n ZMD310xR	3 x 110/190–133/230 V 3 x 220/380–240/415 V
--------------------------------	--

Voltage Range	80%–115% U_n
---------------	----------------

Frequency

Nominal Frequency f_n	50 or 60 Hz
tolerance	$\pm 2\%$

IEC-specific data

Current

Base Current I_b	selectable 5, 10, 20, 40 A
--------------------	----------------------------

Maximal Current I_{max}

metrological	selectable 40, 60, 80, 100, 120 A
thermal	120 A

Short Circuit ≤ 10 ms	5000 A
----------------------------	--------

Measurement Accuracy

Accuracy ZMD310xR	
active energy to IEC 62053-21	class 1
reactive energy to IEC 62053-23	class 1

Measurement Behaviour

Starting Current ZxD310xR

according to IEC	0.4% I_n
typical	0.3% I_n

The startup of the meter is controlled by the starting power and not by the starting current.

Starting Power in M-Circuit	single phase
nominal power x starting current	

MID-specific data

Current (for Class B)

Minimum Current I_{min}	0.25, 0.5, 0.75, 1.0 A
---------------------------	------------------------

Transitional Current I_{tr}	0.5, 1.0, 1.5, 2.0 A
-------------------------------	----------------------

Maximum Current I_{max}	120 A
---------------------------	-------

Measurement Accuracy

ZMD300xR; to EN 50470-3	Class B
-------------------------	---------

Measurement Behaviour

Starting Current I_{st}	0.02, 0.04, 0.06, 0.08 A
---------------------------	--------------------------

General

Operating Behaviour

Voltage Failure (Power Down)

bridging time according to IEC	0.5 s
data storage	after another 0.2 s
switch off	after approx. 2.5 s

Voltage Restoration (Power Up)

function standby 3 phases	after 2 s
function standby 1 phase	after 5 s
detection of energy direction + phase voltage	after 2 to 3 s

Power Consumption

Power Consumption per Phase in Voltage Circuit

phase voltage	110 V	240 V
active power (typical)	0.6 W	1.1 W
apparent power (typical)	0.8 VA	1.5 VA

Power Consumption per Phase in Current Circuit

phase current	10 A
apparent power (typical)	0.03 VA

Environmental Influences

Temperature Range	to IEC 62052-11
operation	-25 °C to +70 °C
storage	-40 °C to +85 °C

Temperature Coefficient

range	from -25 °C to +70 °C
average value (typical)	± 0.012% per K
at $\cos\phi=1$ (from 0.05 I_b to I_{max})	± 0.02% per K
at $\cos\phi=0.5$ (from 0.1 I_b to I_{max})	± 0.03% per K

Impermeability according to IEC 60529	IP52
---------------------------------------	------

Electromagnetic Compatibility

Electrostatic Discharges	to IEC 61000-4-2
contact discharge	15 kV

Electromagnetic RF Fields	to IEC 61000-4-3
80 MHz–2 GHz	10 and 30 V/m

Radio Interference Suppression according to IEC/CISPR 22	class B
--	---------

Fast Transient Burst Test

to IEC 61000-4-4	
current and voltage circuits not under load	4 kV
current and voltage circuits under load according to IEC 62053-21/22/23	2 kV
auxiliary circuits > 40 V	1 kV


Fast Transient Surge Test	to IEC 61000-4-5
current and voltage circuits	4 kV
auxiliary circuits > 40 V	1 kV

Insulation Strength

Insulation Strength	4 kV @ 50 Hz during 1 min
---------------------	---------------------------

Impulse Voltage 1.2/50 μ s

to IEC 62052-11	
current and voltage circuits	8 kV
auxiliary circuits	6 kV

Protection Class II according to IEC 62052-11	
---	---

Calendar Clock

Calendar Type	Gregorian or Persian (Jalaali)
---------------	--------------------------------

Accuracy	< 5 ppm
----------	---------

Backup Time (Power Reserve)

with supercap	> 20 days
loading time for max. backup time	300 h
with battery (optional)	10 years
battery type	CR-P2

Display

Characteristics

type	LCD liquid crystal display
digit size in value field	8 mm
number of positions in value field	up to 8
digit size in index field	6 mm
number of positions in index field	up to 8

Inputs and Outputs

Control Inputs

control voltage U_s	100–240 V AC
input current	< 2 mA ohmic at 230 V AC

Output Contacts

type	solid state relay
voltage	12–240 V AC/DC
max. current	100 mA
max. pulse frequency (pulse length 20 ms)	25 Hz

Optical Test Output

Active and Reactive Energy	
type	red LED
number	2
meter constant	selectable

Communication Interfaces

Optical Interface	according to IEC 62056-21
type	serial, bidirectional, half duplex
max. bit rate	9600 bps
protocols	IEC 62056-21 and dlms

RS232-Interface	to DIN 61393 / DIN 66259
type	serial, asymmetric, asynchronous, bidirectional
operating mode	transparent
nominal voltage	± 9 V DC
maximum voltage	± 15 V DC
minimum voltage	± 5 V DC
max. bit rate	9600 bps
protocols	IEC 62056-21 and dlms
max. conductor length depending on environment and connecting cable	30 m
insulation resistance to meter	4 kVAC / 50 Hz, 1 min
creep distance	≥ 6.2 mm

RS485-Interface	according to ISO-8482
type	serial, symmetric, asynchronous, bidirectional
nominal voltage range	-7 to +12 V DC
binary 1 state	difference voltage < -0.2 V
binary 0 state	difference voltage > 0.2 V
max. bit rate	9600 bps
max. number of slaves	32
protocols	IEC 62056-21 and dlms
max. conductor length depending on environment and connecting cable	1000 m
insulation resistance to meter	4 kVAC / 50 Hz, 1 min
creep distance	≥ 6.2 mm

CS-Interface	to IEC 62056-21 / DIN 66258
type	serial, bidirectional, current interface
nominal voltage without load	24 V DC
max. voltage without load	30 V DC
binary 1 state	10–30 mA
binary 0 state	≤ 2 mA
protocols	IEC 62056-21 and dlms
insulation resistance to meter	4 kVAC / 50 Hz, 1 min
creep distance	≥ 6.2 mm

RS422-Interface	according to ISO-8482
type	serial, symmetric, asynchronous, bidirectional
nominal voltage range	-3 to +3 V DC
binary 1 state	difference voltage < -0.2 V
binary 0 state	difference voltage > 0.2 V
max. bit rate	9600 bps
max. number of slaves	10
protocols	IEC 62056-21 and dlms
max. conductor length depending on environment and connecting cable	1000 m
insulation resistance to meter	4 kVAC / 50 Hz, 1 min
creep distance	≥ 6.2 mm

Additional Power Supply (optional)

On Extension Board 045x	
nominal voltage range	100–240 V AC/DC
tolerance	80–115% U_n
frequency	50 or 60 Hz
max. power consumption	6.8 W

On Extension Board 046x	
nominal voltage range	12–24 V DC
tolerance	80–115% U_n
max. power consumption	3.5 W

Ripple Control Receiver (optional)

On Extension Board 043x or 003x	
Same functionality as RCR161.	
All established RCR systems e.g. Semagyr, Ricontic, Decabit, Double Decabit, K22/Z22 are supported.	
Code length, pulse length and pulse position can be parameterised.	

Electrical Data	
nominal voltage	58 or 230 V
frequency	50 or 60 Hz

Filter Values (parameterisable)	
functional voltage U_f	0.3–2.5% U_n
control frequency f_s	110–2000 Hz
bandwidth	0.6–6% f_s

Weight and Dimensions

Weight approx. 1.5 kg

External Dimensions

width	177 mm
height (with short terminal cover)	244 mm
height (with standard terminal cover)	281.5 mm
height (with extended hook)	305.5 mm
depth	75 mm


Suspension Triangle

height (with extended hook)	230 mm
height (suspension eyelet open)	206 mm
height (suspension eyelet covered)	190 mm
width	150 mm

Terminal Cover

short	no free space
standard	40 mm free space
long	60 mm free space
GSM	60 mm free space
ZxB-type 80 mm	80 mm free space
ZxB-type 110 mm	110 mm free space
ADP1 adapter	
RCR/FTY adapter	

Meter Dimensions (Standard Terminal Cover)

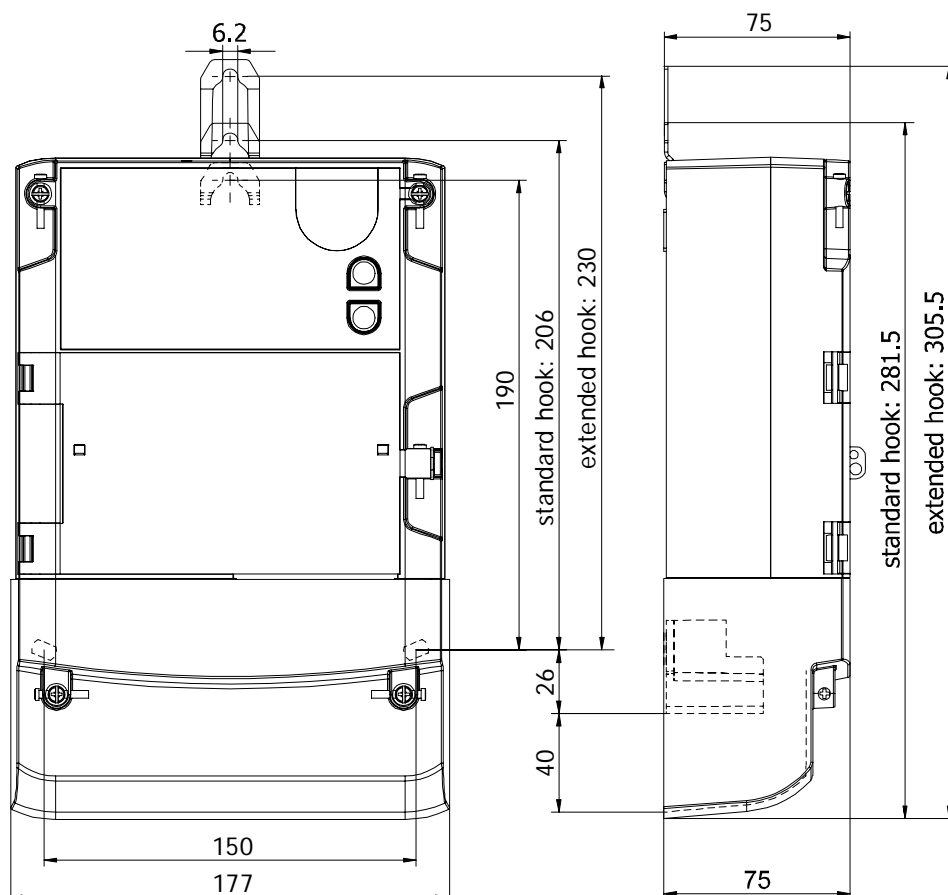

Connections

Phase Connections


type	screw type terminals
diameter for $I_{max} \leq 80 \text{ A}$	8.5 mm
diameter for $I_{max} > 80 \text{ A}$	9.5 mm
minimal conductor cross section	4 mm ²
maximal cross section cable	35 mm ² (up to 120 A)
maximal cross section strand	25 mm ² (up to 80 A)
screw head	Pozidrive Combi No. 2
screw dimension	M6 x 14
max. screw head diameter	≤ 6.6 mm
tightening torque	< 3 Nm

RS232-Interface

on interface board c1

type

RJ 12

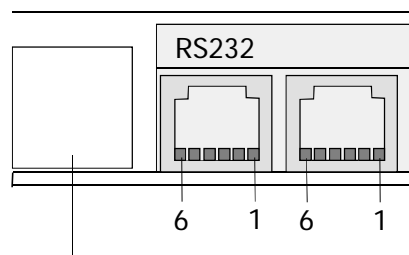

Opening for spring-loaded terminal
(not fitted on type c1 interface board)

Pin allocation RS232:

- 1 not used
- 2 TxD
- 3 GND
- 4 not used
- 5 RxD
- 6 not used


The two RJ12 jacks of the RS232-interface are looped internally. Only one of them must be used however.

RS485-Interface

on interface board c2

type

RJ 12

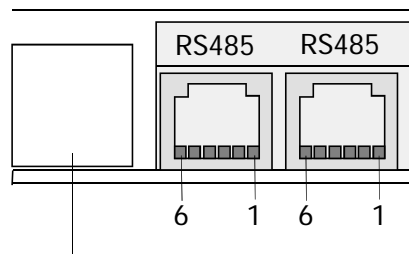

Opening for spring clamp terminal
(not fitted on type c2 interface board)

Pin allocation RS485:

- 1 GND
- 2 UP (Data a)
- 3 UN (Data b)
- 4 UN (Data b)
- 5 UP (Data a)
- 6 GND


The two RJ12 jacks of the RS485-interface are looped internally to permit a connection of several meters.

CS-Interface

on interface board c3

type


screwless spring-type terminals

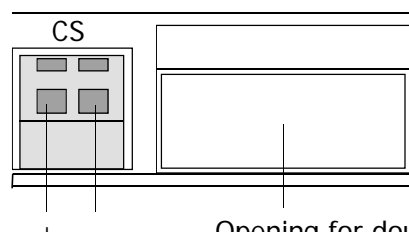

Opening for double RJ12 jack
(not fitted on type c3 interface board)

type

RJ 12

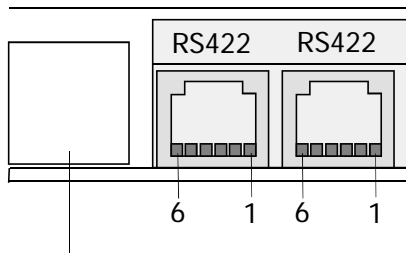

Opening for spring clamp terminal
(not fitted on type c6 interface board)

Pin allocation RS422:

- 1 GND
- 2 UP (Data a)
- 3 UN (Data b)
- 4 UN (Data z)
- 5 UP (Data y)
- 6 GND

The two RJ12 jacks of the RS422-interface are looped internally to permit a connection of several meters.

Other Connections

type

screwless spring-type terminal


max. current of voltage outputs

1 A

max. voltage of inputs

250 V


Terminal Dimensions

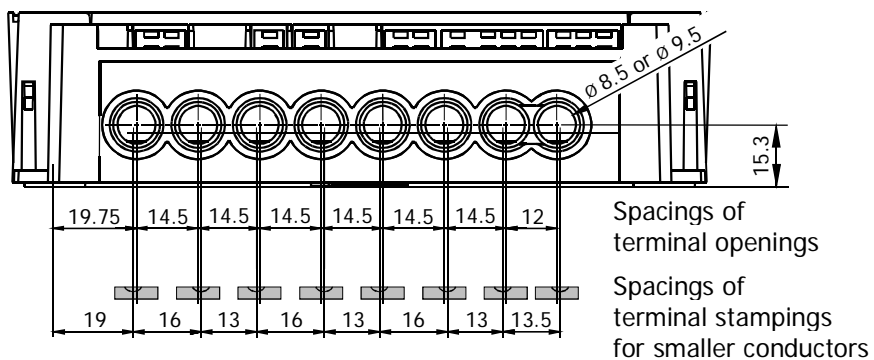

Spacings of terminal openings

Spacings of terminal stampings for smaller conductors

Terminal Layout

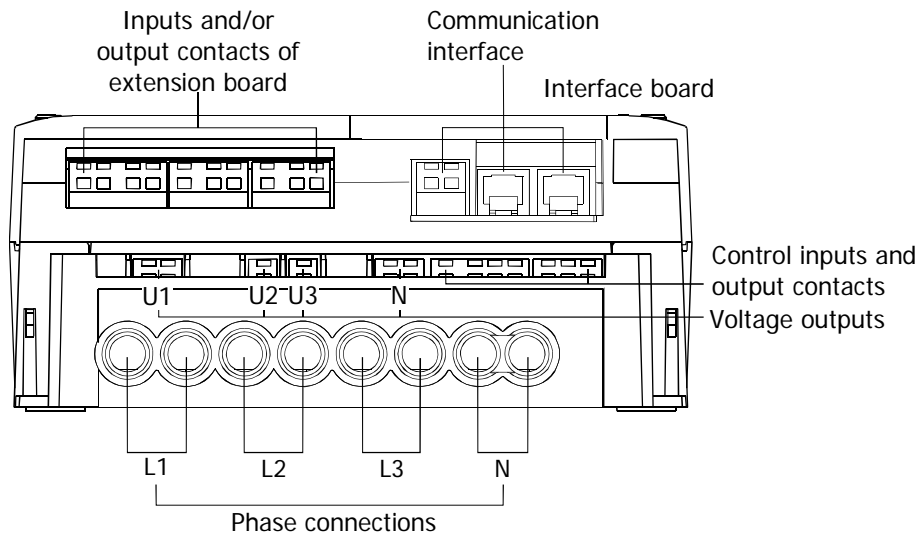

Material

Housing

The meter housing is made of polycarbonate which is partly glass-fibre reinforced.

Type designation	ZMD	3	10	C	R	44	4207	.c1
Network Type	_____							
ZFD	3-phase 3 wire network (F-circuit)							
ZMD	3-phase 4 wire network (M-circuit)							
Connection Type	_____							
3	Direct connection							
4	Transformer operated							
Accuracy Class	_____							
10	Active energy class 1 (IEC), B (MID)							
05	Active energy class 0.5 (IEC), C (MID)							
Measured Quantities	_____							
C	Active and reactive energy							
A	Active energy							
Construction	_____							
T	With exchangeable communication units							
Tariffication	_____							
21	Energy rates, external rate control via control inputs							
24	Energy rates, internal rate control via time switch (additionally possible via control inputs)							
41	Energy and demand rates, external rate control via control inputs							
44	Energy and demand rates, internal rate control via time switch (additionally possible via control inputs)							
	All versions with 3 control inputs and 2 output contacts							
Additional functions	_____							
060x	6 outputs							
240x	2 control inputs, 4 outputs							
420x	4 control inputs, 2 outputs							
003x	integrated ripple control receiver							
043x	4 outputs, integrated ripple control receiver							
045x	4 outputs, additional power supply 100–240 V AC/DC							
046x	4 outputs, additional power supply 12–24 V DC							
xxx0	no additional functions							
xxx7	load profile							
Integrated Interface (R-types only)	_____							
c1	RS232 interface							
c2	RS485 interface							
c3	CS interface							
c6	RS422 interface							

Subject to change without notice.

Landis+Gyr AG
 Feldstrasse 1
 CH-6301 Zug
 Switzerland
 Phone: +41 41 935 6000
 www.landisgyr.com

